

ALTOS® Loose Tube, Gel-Free Cable 96 F, Single-mode (OS2)



Part Number:
096EU4-T4100D20


Corning ALTOS® all-dielectric gel-free cables are designed for outdoor and limited indoor use for backbones in lashed aerial and duct installations. The loose tube gel-free design is fully waterblocked using craft-friendly, water-swellable materials, which means cable access is simple and no clean up is required. The flexible craft-friendly buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to strip.

Features and Benefits


Gel-free waterblocking technology
Craft-friendly cable preparation

Polyethylene jacket
Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

All-dielectric construction
Requires no grounding or bonding

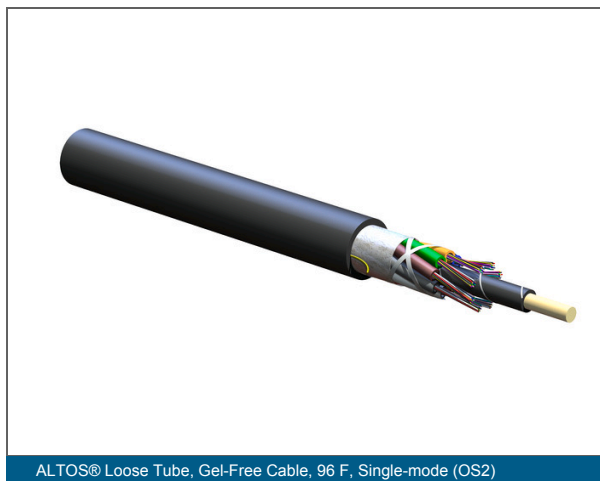

ALTOS® Loose Tube, Gel-Free Cable, 96 F, Single-mode (OS2)

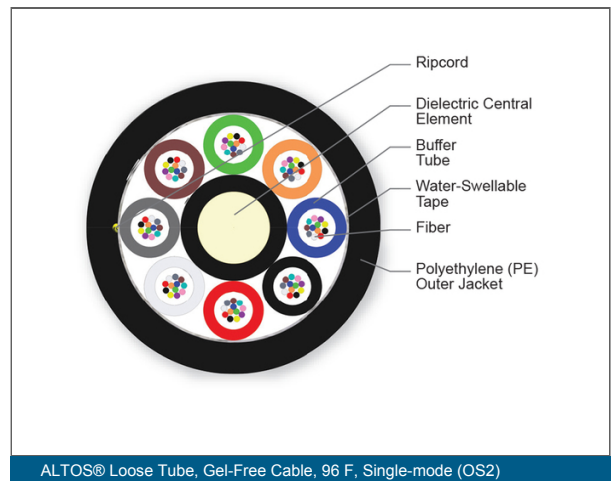

ALTOS® Loose Tube, Gel-Free Cable, 96 F, Single-mode (OS2)

Product Specification 096EU4-T4100D20_NAFTA_AEN

Page 1 | Revision Date 2024-04-10

CONTACT US



1841 Industrial Ave
San Angelo, TX 76904
(325) 262-4031

www.unitedtelsupply.com



and

CORNING



ALTOS® Loose Tube, Gel-Free Cable 96 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Outdoor
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)
Application	Aerial, Duct
Fiber Count	96

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Outdoor lashed aerial and duct, indoor when installed according to National Electrical Code® (NEC®) Article 770
Design and Test Criteria	ANSI/ICEA S-87-640

Environmental Conditions

Temperature Range, Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Notes	Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

Cable Design

Central Element	Dielectric
Fiber Count	96
Number of Ripcords	1
Outer Jacket Color	Black



ALTOS® Loose Tube, Gel-Free Cable 96 F, Single-mode (OS2)



Cable Design	
Outer Jacket Material	Polyethylene (PE)
Buffer Tube Color	Blue, Orange, Green, Brown, Slate, White, Red, Black
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Active Tubes	8
Number of Tube Positions	8
Tape	Water-swellable
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Color Code Standards	Telcordia

Mechanical Specifications	
Max. Tensile Strength, Long-Term	890 N (200.08 lbf)
Max. Tensile Strength, Short-Term	2700 N (606.98 lbf)
Nominal Outer Diameter	12.2 mm (0.48 in)
Min. Bend Diameter Installation	366 mm (14.41 in)
Min. Bend Diameter Operation	244 mm (9.61 in)

Optical Characteristics	
Fiber Code	E
Fiber Name	Single-mode (OS2)
Fiber Type	Single-mode
Performance Option Code	00
Maximum Attenuation	0.35 dB/km / 0.35 dB/km / 0.25 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D

ALTOS® Loose Tube, Gel-Free Cable 96 F, Single-mode (OS2)



Dimensions	
Cable Weight	98 kg/km (65.85 lb/1000 ft)



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2024 Corning Optical Communications. All rights reserved.



and

